

Report for Resurfacing Lytham Promenade Coastal Path 2017-2018

Location 1: Sectional repairs between Dicconson Terrace Carpark (chainage 0m) to Seafield Road (chainage 855m)

Location 2: Sectional repairs between Lytham Windmill (chainage 0m) heading towards Bath St Carpark (chainage 163m)

Location 3: Localised repair and minor surface works.

Location 4: Localised repair and minor surface works.

Survey Date: 23rd August 2017


Weather: Sunny

Surveyed by: Jon Rutter

Location Plan



AERIAL PHOTOGRAPH SHOWING START AND END OF LYTHAM PROMENADE SURVEY
LOCATION 1

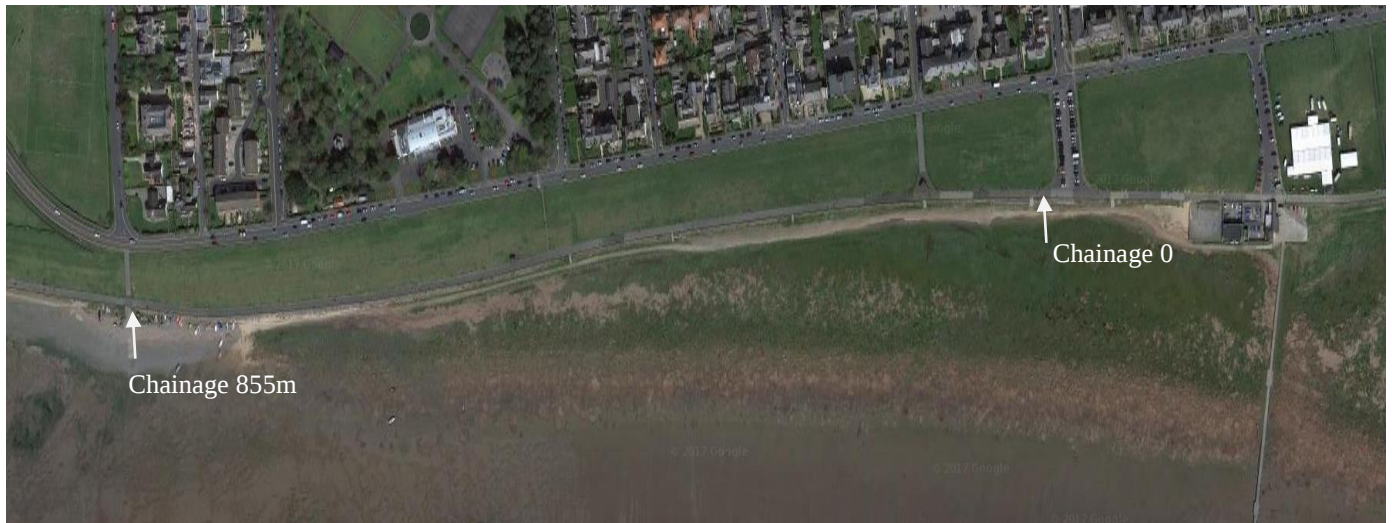

Location 1 Sectional repair 1

Photo 1&2 – Chainage 0-38.5m resurface full width. Approx. 212m²



START SECT 1
CHAINAGE 0M

Photo 2 – Chainage 22m



FINISH SEC 1
CHAINAGE 38.5M

CHAINAGE 22M


Location 1 sectional repair 2

Photo 3, 4, 5, 6, 7 & 8 – Chainage 172-396m resurface full width. Approx. 1232m²




START SEC 2
CHAINAGE 172M

Photo 4 – Chainage 235m

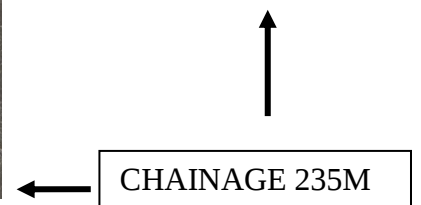

CHAINAGE 235M

Photo 5 - Chainage 260m

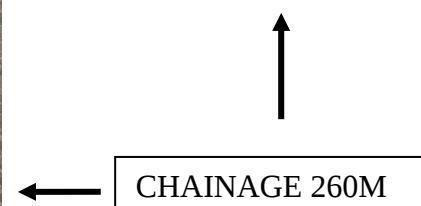

CHAINAGE 260M

Photo 6 – Chainage 290m

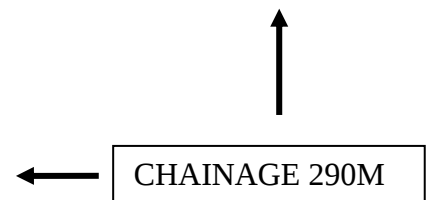


Photo 7 – Chainage 347m

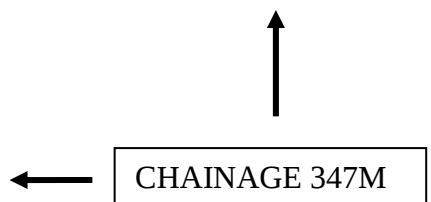


Photo 8 – Chainage 370



FINISH SEC 2
CHAINAGE 396M



CHAINAGE 370M

Location 1 sectional repair 3

Photo 9, 10, 11, 12, 13, 14 & 15 – Chainage 419-855m resurface full width. Approx. 2398m²



START SEC 3
CHAINAGE 419M



Photo 10 – Chainage 426m



↑
CHAINAGE 426M

Photo 11 – Chainage 494m



↑
CHAINAGE 494M

Photo 12 – Chainage 587m



CHAINAGE 587M

Photo 13 – Chainage 632m



CHAINAGE 632M

Photo 14 – Chainage 769m


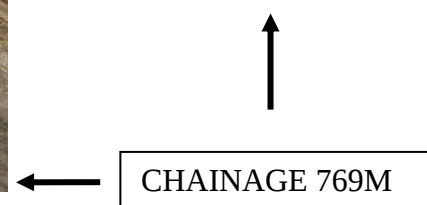


Photo 15 – Chainage 855



Approximate total area for Location 1 resurfacing – 3842m²

AERIAL PHOTOGRAPH SHOWING START AND END OF LYTHAM PROMENADE SURVEY
LOCATION 2



Location 2 section 1

Photo 16 – Chainage 0m – 04.9m resurface full 4m width to stone flags. Approx. 19.6m²



FINISH SEC 1
CHAINAGE 4.9M

START SEC 1
CHAINAGE 0M

Location 2 section 2

Photo 17 – Chainage 42m – 86m resurface full width. Approx. 242 m²



FINISH SEC 2
CHAINAGE 86M

START SEC 2
CHAINAGE 42M

Location 2 section 3

Photo 18 – Chainage 108m – 163m resurface full width. Approx. 297m²



FINISH SEC 3
CHAINAGE 163M

START SEC 3
CHAINAGE 108M

Approximate total area for Location 2 resurfacing – 558.6

END OF SURVEY

